



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

RT-158MA-S-PRS UNDERCOUNTER PREP TABLE



Key Features



**Forced Evaporation
System**



**LED Interior
Lighting**




**GN Trays flexible
arrangement**
(GN Trays are not included)*

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

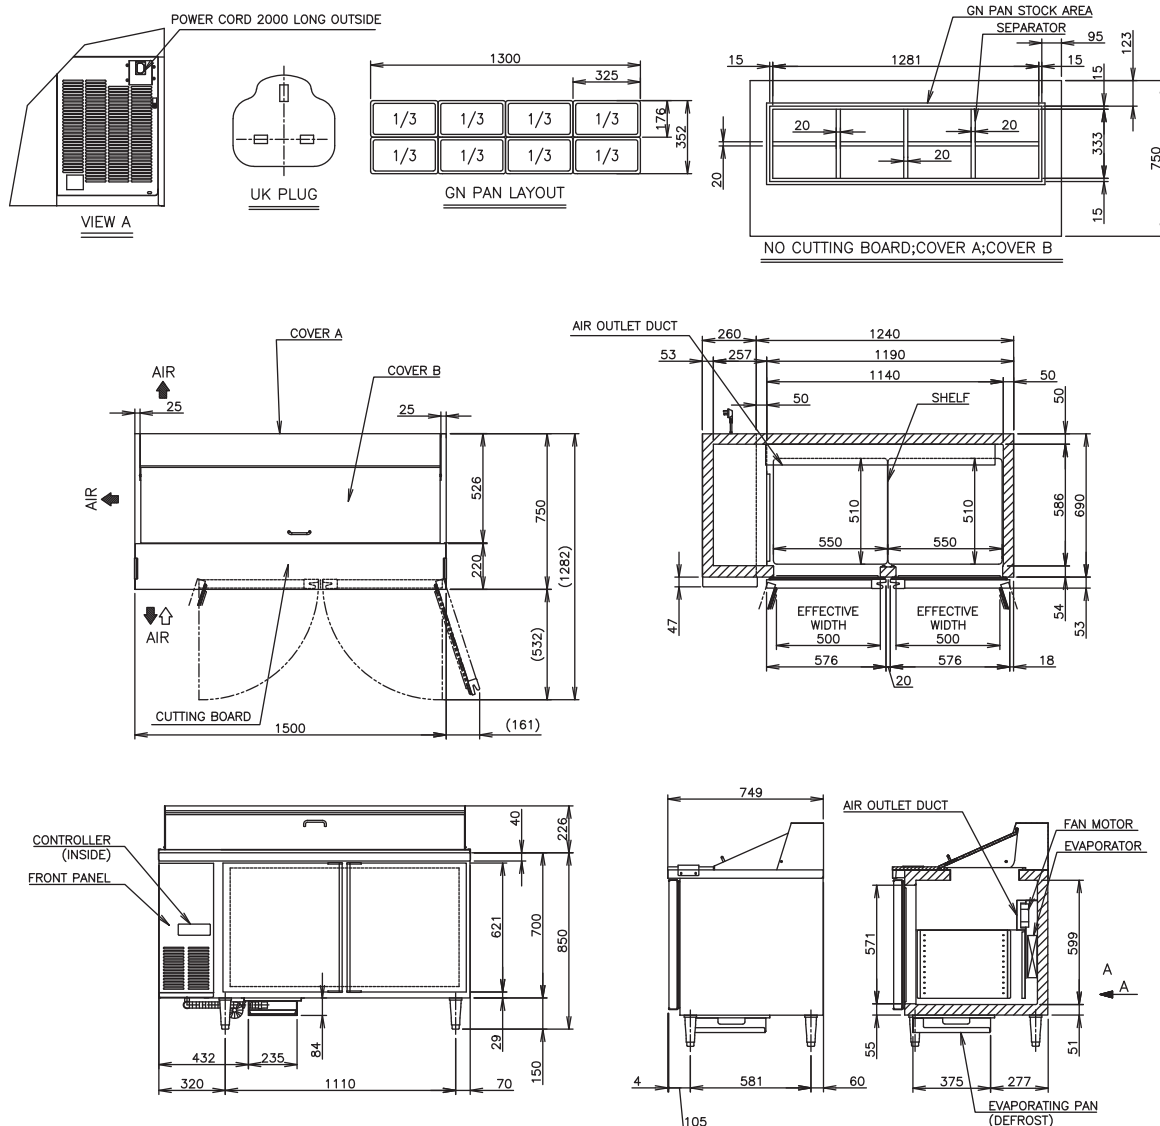

MODEL	RT-158MA-S-PRS
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.78kVA (3.55A)
ELECTRIC CONSUMPTION	Heater: 141W, Defrost: 141W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12° C
EFFECTIVE CAPACITY	410L
WEIGHT	Net: 94kg (Gross: Approx. 99kg)
OUTSIDE DIMENSIONS	1500mm(W)× 750mm(D)×1076(-1106)mm(H)
PACKAGE	Carton: 1565mm(W)×830mm(D)×1015mm(H)
AMPERAGE	Rated: 2.5A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

16, JALAN TP5A, Prestij 16,
Taman Perindustrian Uep, 47620 Subang Jaya, Selangor
TEL +603-8023 5823 <https://hoshizaki.com.my/>

