

## **CERTIFICATION**





ISO9001

## RT-158MA-S-PRS **UNDERCOUNTER PREP TABLE**



## **Key Features**








Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.

## **Dimensions & Specifications**

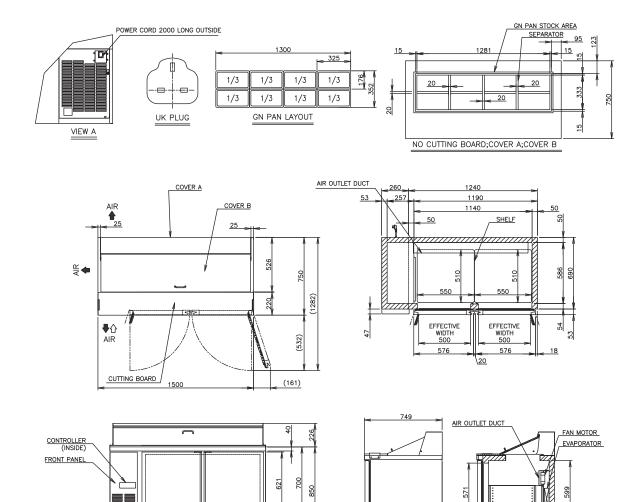

MODEL	RT-158MA-S-PRS
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.78kVA (3.55A)
ELECTRIC CONSUMPTION	Heater: 141W, Defrost: 141W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12° C
EFFECTIVE CAPACITY	410L
WEIGHT	Net: 94kg (Gross: Approx. 99kg)
OUTSIDE DIMENSIONS	1500mm(W)× 750mm(D)×1076(-1106)mm(H)
PACKAGE	Carton: 1565mm(W)×830mm(D)×1015mm(H)
AMPERAGE	Rated: 2.5A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%

29

105



HOSHIZAKI VIETNAM CORPORATION

168/14 Nguyen Gia Tri Street, Ward 25, Binh Thanh District, Ho Chi Minh City TEL +84 0 916 161 346 https://hoshizaki-sea.com/

320



EVAPORATING PAN (DEFROST)