

CERTIFICATION





ISO9001

RT-158MA-S-PRS **UNDERCOUNTER PREP TABLE**



Key Features









Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.

Dimensions & Specifications

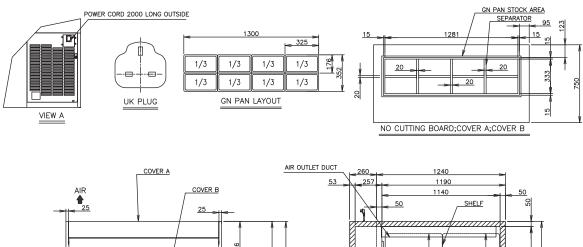

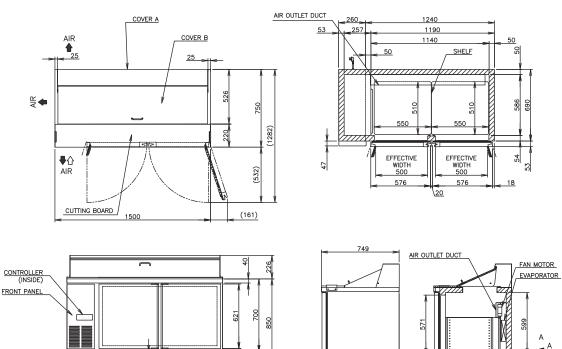

105

MODEL	RT-158MA-S-PRS
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.78kVA (3.55A)
ELECTRIC CONSUMPTION	Heater: 141W, Defrost: 141W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12° C
EFFECTIVE CAPACITY	410L
WEIGHT	Net: 94kg (Gross: Approx. 99kg)
OUTSIDE DIMENSIONS	1500mm(W)× 750mm(D)×1076(-1106)mm(H)
PACKAGE	Carton: 1565mm(W)×830mm(D)×1015mm(H)
AMPERAGE	Rated: 2.5A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%

29



HOSHIZAKI SINGAPORE PTE LTD

18 Boon Lay Way #01-102 Tradehub21, Singapore, 609966 TEL 6225 2612 FAX 6225 3219 www.hoshizaki.com.sg

320



EVAPORATING PAN (DEFROST)