

CERTIFICATION





ISO9001

RT-186MA-S-3D UNDERCOUNTER REFRIGERATOR



Key Features








Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.

Dimensions & Specifications

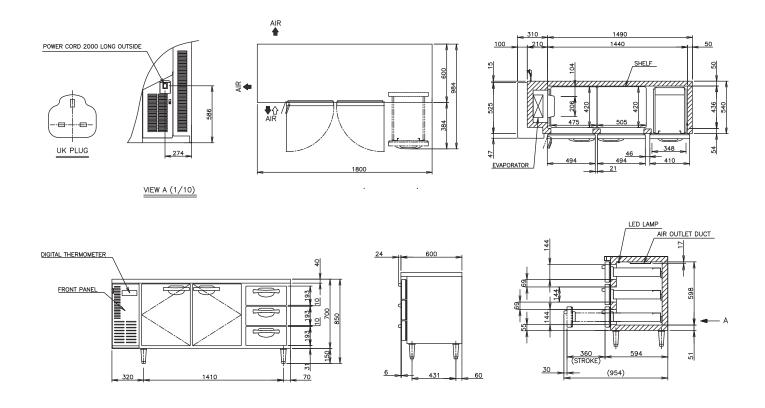

MODEL	RT-186MA-S-3D
POWER SUPPLY	1 Phase 230V 50Hz, Capacity: 0.67kVA (3.05A)
ELECTRIC CONSUMPTION	Motor: 270W, Heater: 201W, Refrigeration: 280W, Defrost: 165W
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C
EFFECTIVE CAPACITY	401L
WEIGHT	Net: 93kg (Gross: Approx 98kg)
OUTSIDE DIMENSIONS	1800mm (W) x 600mm (D) x 850(-880)mm (H)
PACKAGE	Carton: 1865mm (W) x 680mm (D) x 790mm (H)
AMPERAGE	Rated 2.1A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 to 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI SINGAPORE PTE LTD

18 Boon Lay Way #01-102 Tradehub21, Singapore, 609966 TEL 6225 2612 FAX 6225 3219 www.hoshizaki.com.sg

