



HOSHIZAKI

CERTIFICATION



HACCP International




ISO9001

RT-186MA-S-ML UNDERCOUNTER PILLAR-LESS REFRIGERATOR




Key Features



**Forced Evaporation
System**



**LED Interior
Lighting**




**Pillar-less
design**







Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

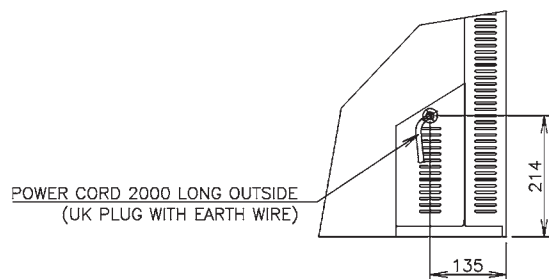

VIEW A(1/10)

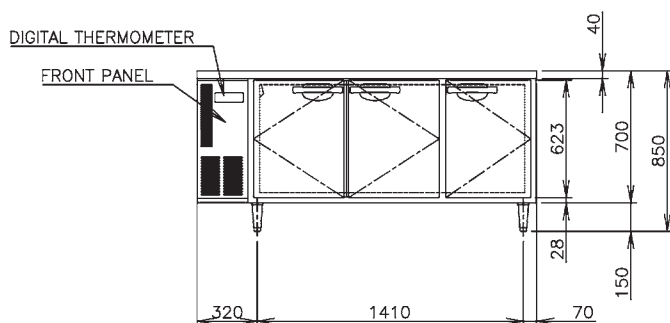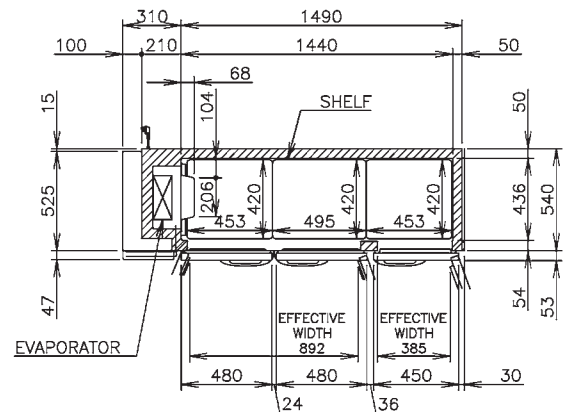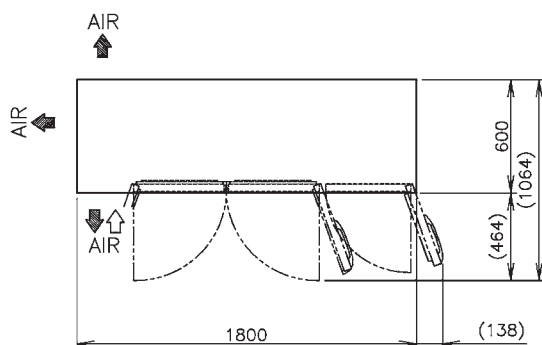

MODEL	RT-186MA-S-ML
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.67kVA (3.05A)
ELECTRIC CONSUMPTION	Motor: 270W Heater: 201W Refrigeration: 280W Defrost: 165W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12° C
EFFECTIVE CAPACITY	401L
WEIGHT	Net: 93kg (Gross: Approx. 98kg)
OUTSIDE DIMENSIONS	1800mm(W)× 600mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1865mm(W)×680mm(D)×790mm(H)
AMPERAGE	Rated: 2.1A
SHELF	3 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1, Soi Ngamwongwan 47
Intersection 42, Thung Song Hong, Subdistrict, Lak Si District, Bangkok 10210

TEL +66 2 005 9980 FAX +66 2 516 2646 <https://hoshizaki.co.th/en/>

