



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

RT-186MA-SSG UNDERCOUNTER SLIDING GLASS DOOR REFRIGERATOR



Key Features



**Forced Evaporation
System**




**LED Interior
Lighting**

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

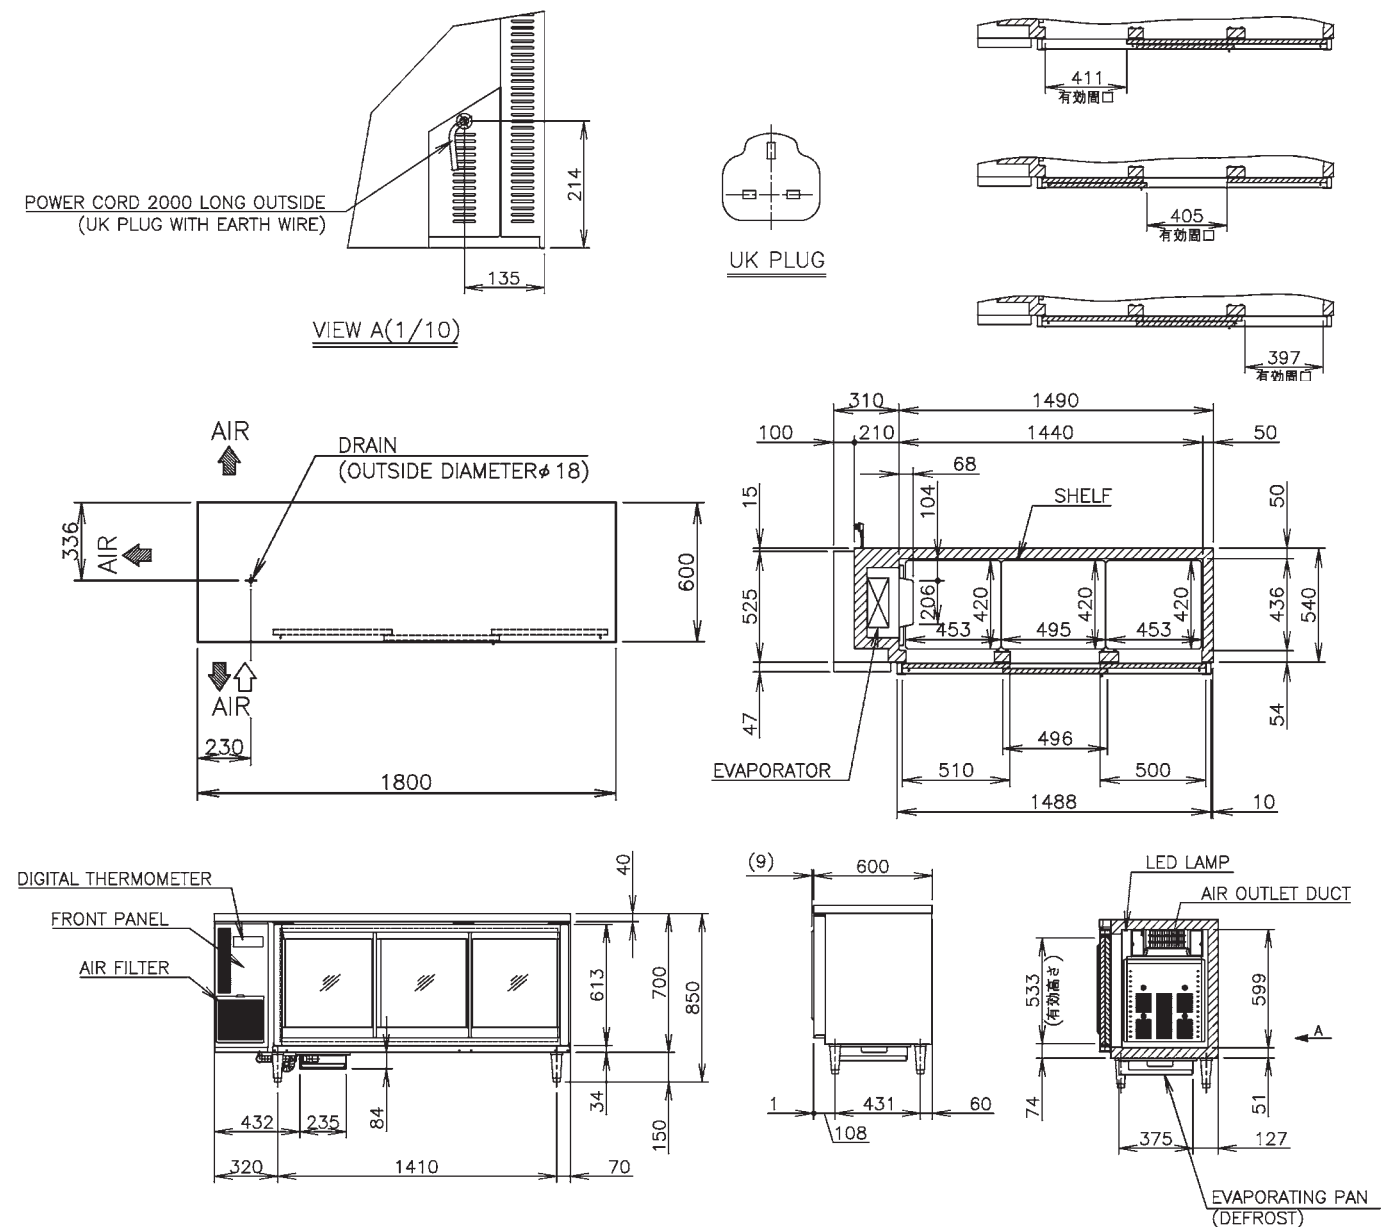

MODEL	RT-186MA-SSG
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.5kVA (2.27A)
ELECTRIC CONSUMPTION	Motor: 248W Heater: 89W Refrigeration: 315W Defrost: 89W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -2 to 12° C
EFFECTIVE CAPACITY	401L
WEIGHT	Net: 115kg (Gross: Approx. 121kg)
OUTSIDE DIMENSIONS	1800mm(W)×600mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1865mm(W)×680mm(D)×790mm(H)
AMPERAGE	Rated: 2.0A
SHELF	6 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage \pm 6%



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

16, JALAN TP5A, Prestij 16,
Taman Perindustrian Uep, 47620 Subang Jaya, Selangor
TEL +603-8023 5823 <https://hoshizaki.com.my/>

