



HOSHIZAKI

CERTIFICATION



HACCP International




ISO9001

RT-188MA-S UNDERCOUNTER BAKERY REFRIGERATOR




Key Features



**Forced Evaporation
System**



**LED Interior
Lighting**










**Sheet Pan (W400 x
D600) max. 23 tiers**
(SHEET PANS are not
included)

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

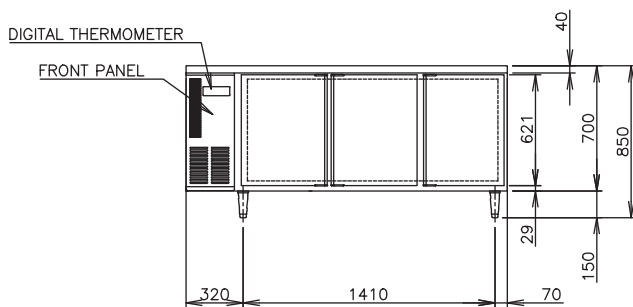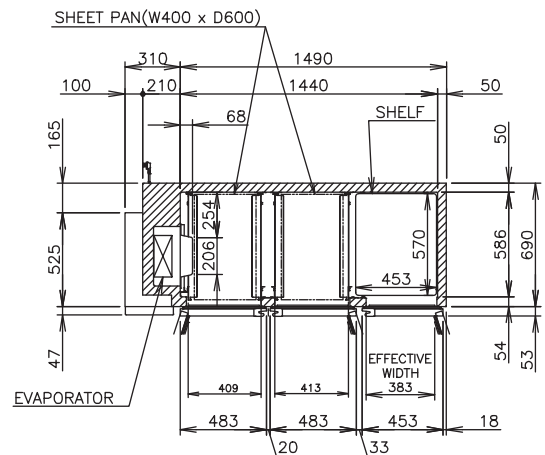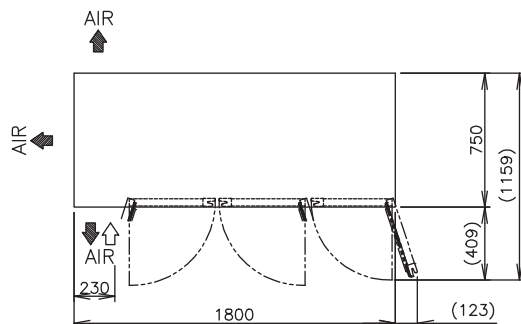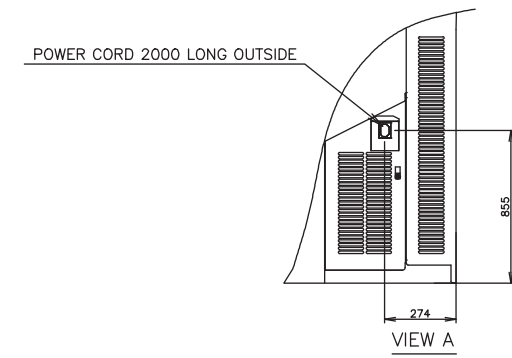

MODEL	RT-188MA-S
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.67kVA (3.05A)
ELECTRIC CONSUMPTION	Motor: 270W Heater: 201W Refrigeration: 280W Defrost: 165W
TEMPERATURE CONTROL	Microprocessor Adjustable from -6 to 12°C
EFFECTIVE CAPACITY	502L
WEIGHT	Net:102 (Gross: Approx. 107kg)
OUTSIDE DIMENSIONS	1800mm(W)× 750mm(D)×850(-880)mm(H)
PACKAGE	Carton 1865mm(W)×830mm(D)×790mm(H)
AMPERAGE	Rated: 2.1A
SHELF	Tray Shelf (5 tiers) Shelf 2pcs.
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

16, JALAN TP5A, Prestij 16,
Taman Perindustrian Uep, 47620 Subang Jaya, Selangor
TEL +603-8023 5823 <https://hoshizaki.com.my/>

