

CERTIFICATION





RT-188MA-SSG

UNDERCOUNTER SLIDNG GLASS DOOR REFRIGERATOR




Key Features





Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.

Dimensions & Specifications

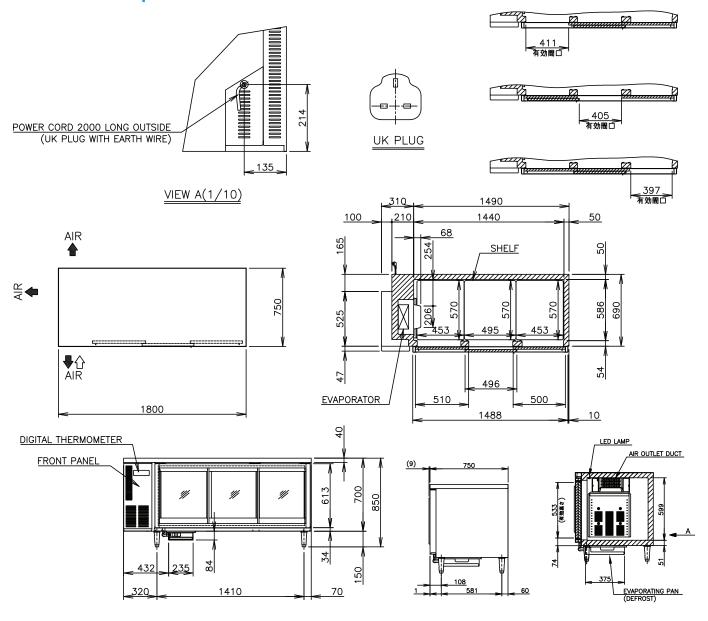

MODEL	RT-188MA-SSG
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.67kVA (3.05A)
ELECTRIC CONSUMPTION	Motor: 261W Heater: 201W Refrigeration: 280W Defrost: 165W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -2 to 12° C
EFFECTIVE CAPACITY	502L
WEIGHT	Net: 124kg (Gross: Approx. 130kg)
OUTSIDE DIMENSIONS	1800mm(W)×750mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1865mm(W)×830mm(D)×790mm(H)
AMPERAGE	Rated: 2.5A
SHELF	6 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI MALAYSIA SDN. BHD.

16, JALAN TP5A, Prestij 16,

Taman Perindustrian Uep, 47620 Subang Jaya, Selangor TEL +603-8023 5823 https://hoshizaki.com.my/

