

CERTIFICATION





RTL-108MA-SD

LOW DRAWER UNDERCOUNTER REFRIGERATOR




Key Features







Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.


Dimensions & Specifications












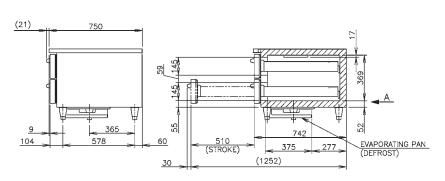

MODEL	RTL-108MA-SD
POWER SUPPLY	1 Phase 220 - 240V 50Hz Capacity: 0.5kVA(2.27A)
ELECTRIC CONSUMPTION	Motor: 225W Heater: 238W Refrigeration: 304W Defrost: 238W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12° C
EFFECTIVE CAPACITY	85L
WEIGHT	Net: 67kg (Gross 72kg)
OUTSIDE DIMENSIONS	980mm(W) × 750mm(D) × 570 (560-590) mm(H)
PACKAGE	Carton 1045mm(W) × 830mm(D) × 560mm(H)
AMPERAGE	Rated: 1.9 A
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1, Soi Ngamwongwan 47 Intersection 42, Thung Song Hong, Subdistrict, Lak Si District, Bangkok 10210 TEL +66 2 005 9980 FAX +66 2 516 2646 https://hoshizaki.co.th/en/

