



# HOSHIZAKI

## CERTIFICATION



HACCP International




ISO9001


## RTL-146MA-SD LOW DRAWER UNDERCOUNTER REFRIGERATOR



### Key Features



**Forced Evaporation  
System**




**2/3 GN Compatible  
Drawers**

(GN Trays are not included)\*  
\*Max. Depth 100mm







Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



## Dimensions & Specifications

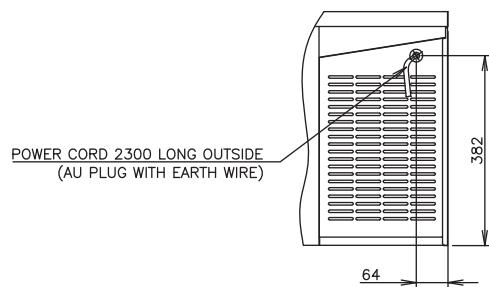

VIEW A (1/10)

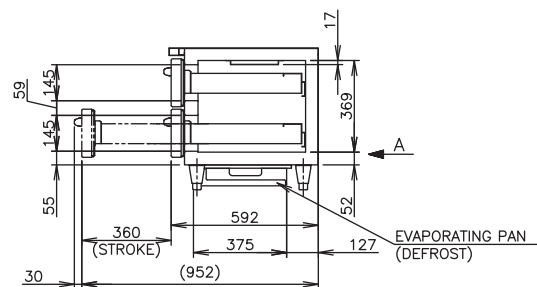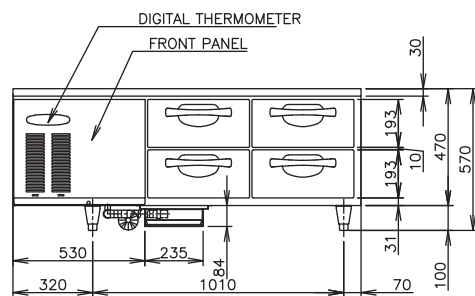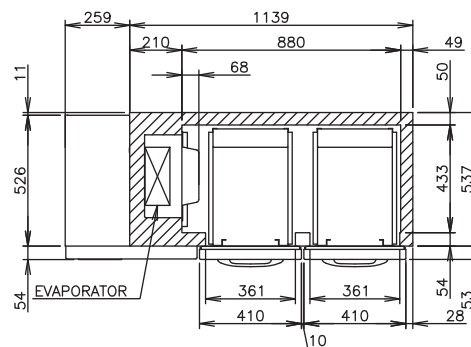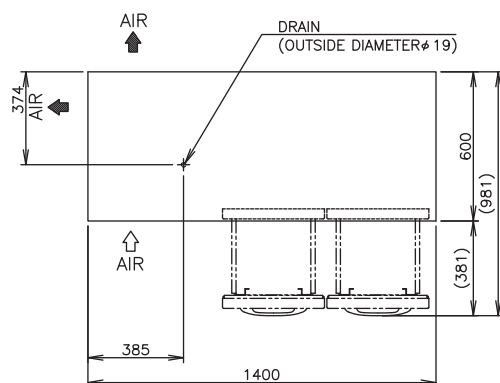

MODEL	RTL-146MA-SD
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.5kVA(2.27A)
ELECTRIC CONSUMPTION	Heater: 250W Defrost: 165W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12° C
EFFECTIVE CAPACITY	129L
WEIGHT	Net: 95kg (Gross 100kg)
OUTSIDE DIMENSIONS	1400mm(W) × 600mm(D) × 570 (560-590) mm(H)
PACKAGE	Carton 1465mm(W) × 680mm(D) × 560mm(H)
AMPERAGE	Rated: 2.2A
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



# HOSHIZAKI

**HOSHIZAKI SINGAPORE PTE LTD**

18 Boon Lay Way #01-102 Tradehub21, Singapore, 609966

TEL 6225 2612 FAX 6225 3219 [www.hoshizaki.com.sg](http://www.hoshizaki.com.sg)

