



HOSHIZAKI

CERTIFICATION



HACCP International




ISO9001


RTL-148MA-SD LOW DRAWER UNDERCOUNTER REFRIGERATOR



Key Features



**Forced Evaporation
System**




**1/1 GN Compatible
Drawers**

(GN Trays are not included)*
*Max. Depth 100mm







Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

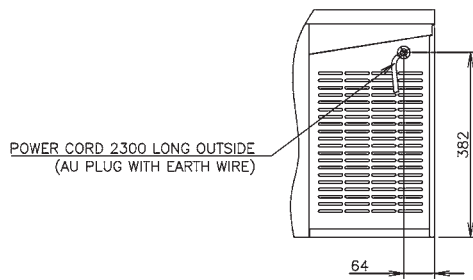

VIEW A (1/10)

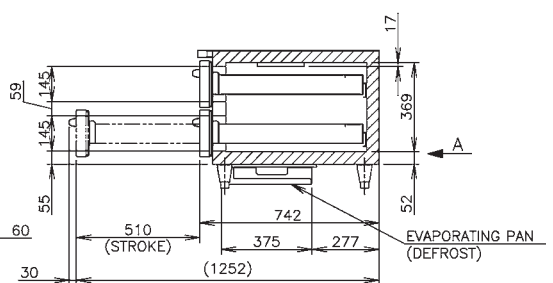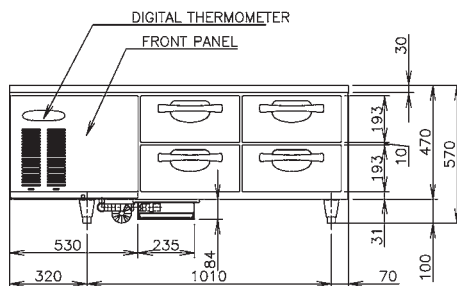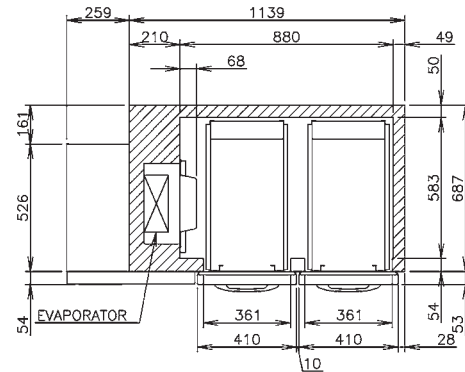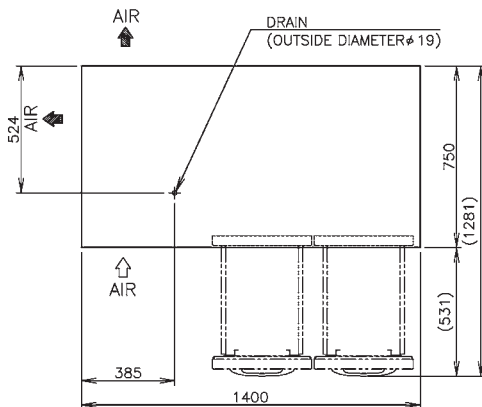

MODEL	RTL-148MA-SD
POWER SUPPLY	1 Phase 220 - 240V 50Hz Capacity: 0.5kVA(2.27A)
ELECTRIC CONSUMPTION	Motor: 225W Heater: 250W Refrigeration: 324W Defrost: 250W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12° C
EFFECTIVE CAPACITY	176L
WEIGHT	Net: 95kg (Gross 100kg)
OUTSIDE DIMENSIONS	1400mm(W) × 750mm(D) × 570 (560-590) mm(H)
PACKAGE	Carton 1465mm(W) × 830mm(D) × 560mm(H)
AMPERAGE	Rated: 1.9 A
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1, Soi Ngamwongwan 47
Intersection 42, Thung Song Hong, Subdistrict, Lak Si District, Bangkok 10210
TEL +66 2 005 9980 FAX +66 2 516 2646 <https://hoshizaki.co.th/en/>

