



# HOSHIZAKI

## CERTIFICATION



HACCP International




ISO9001


## RTL-186MA-SD LOW DRAWER UNDERCOUNTER REFRIGERATOR



### Key Features



**Forced Evaporation  
System**




**2/3 GN Compatible  
Drawers**

(GN Trays are not included)\*  
\*Max. Depth 100mm

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



## Dimensions & Specifications

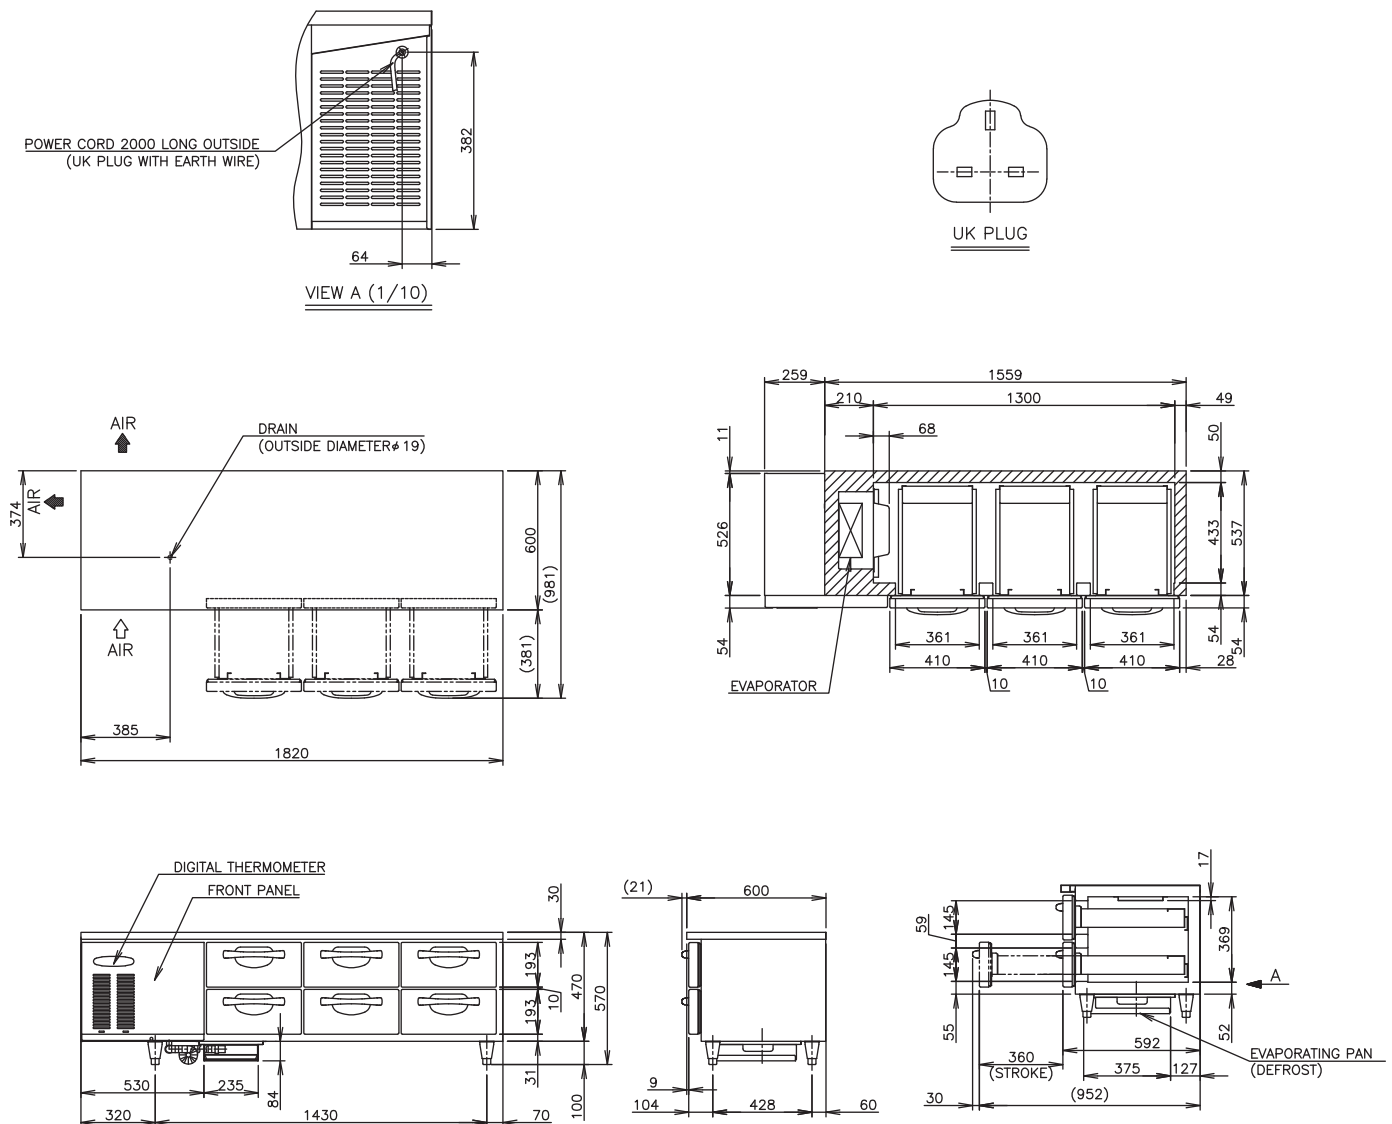

MODEL	RTL-186MA-SD
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.5kVA(2.27A)
ELECTRIC CONSUMPTION	Heater: 260W Defrost: 165W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12° C
EFFECTIVE CAPACITY	198L
WEIGHT	Net: 120kg (Gross 125kg)
OUTSIDE DIMENSIONS	1820mm(W) × 600mm(D) × 570 (560-590) mm(H)
PACKAGE	Carton 1865mm(W) × 680mm(D) × 560mm(H)
AMPERAGE	Rated: 2.2A
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



# HOSHIZAKI

### PT. HOSHIZAKI INDONESIA

Kirana Boutique Office Kirana Avenue 2 Blok C2 No. 6 Jl. Raya  
Boulevard No.1 Kelapa Gading, Jakarta Utara, DKI Jakarta, 14240  
TEL +62-21-2937 5551/2 FAX +62 21 2937 5553  
<https://hoshizaki.co.id/>

