



# HOSHIZAKI

## CERTIFICATION



HACCP International




ISO9001

## RTL-188MA-PD


### LOW DRAWER UNDERCOUNTER REFRIGERATOR



## Key Features



**Forced Evaporation  
System**




**1/1 GN Compatible  
Drawers**

(GN Trays are not included)\*  
\*Max. Depth 100mm

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



## Dimensions & Specifications

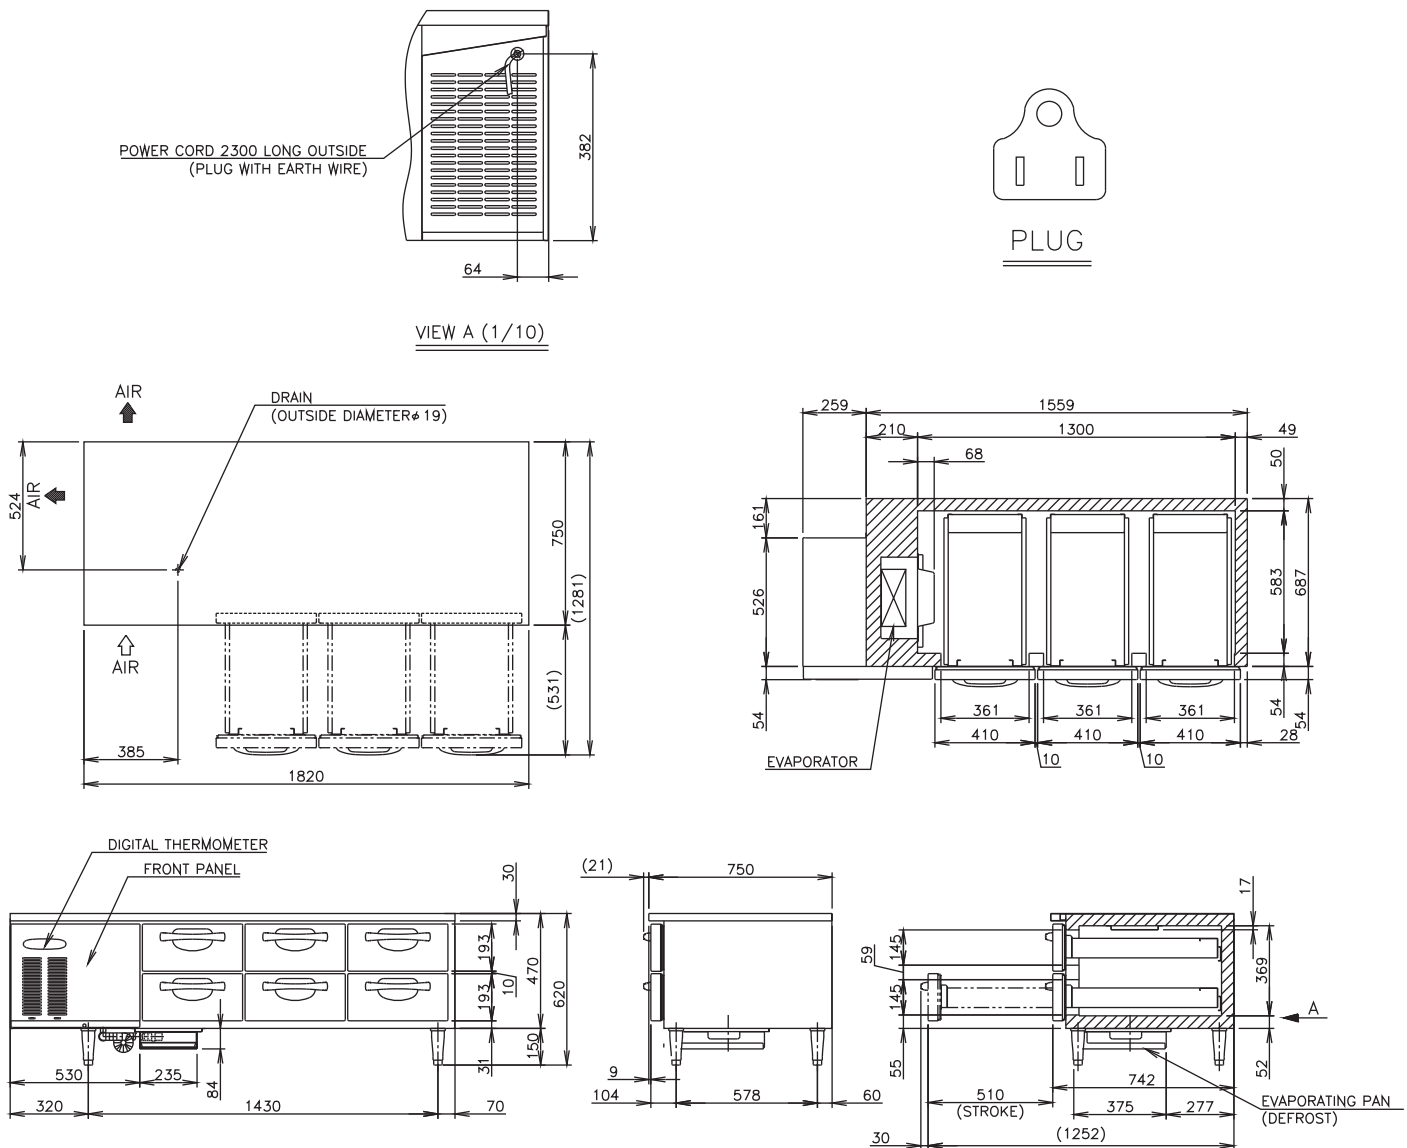

MODEL	RTL-188MA-PD
POWER SUPPLY	1 Phase 230V 60Hz
ELECTRIC CONSUMPTION	Heater: 260W Defrost: 165W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12° C
EFFECTIVE CAPACITY	267L
WEIGHT	Net: 120kg (Gross 125kg)
OUTSIDE DIMENSIONS	1820mm(W) x 750mm(D) x 570 (560-590) mm(H)
PACKAGE	Carton 1865mm(W) x 830mm(D) x 560mm(H)
AMPERAGE	Rated: 2.2 A
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage $\pm$ 6%



# HOSHIZAKI

**HOSHIZAKI PHILIPPINES CORPORATION**

Unit No. GB-2, G/F Agustin 1 Bldg., # 28 F. Ortigas Center, Pasig City, 1605

TEL +632 8839 2861 <https://hoshizaki-sea.com/>

