



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001



Compliant with IEC60335-2-89 Standard

RT-128MC-S UNDERCOUNTER REFRIGERATOR




Key Features



Lower running cost



Strong cooling power



LED lighting



Drainage-Free Design



Large and clear display



Rounded corner




Removal door gaskets



NATURAL REFRIGERANTS



Dimensions & Specifications

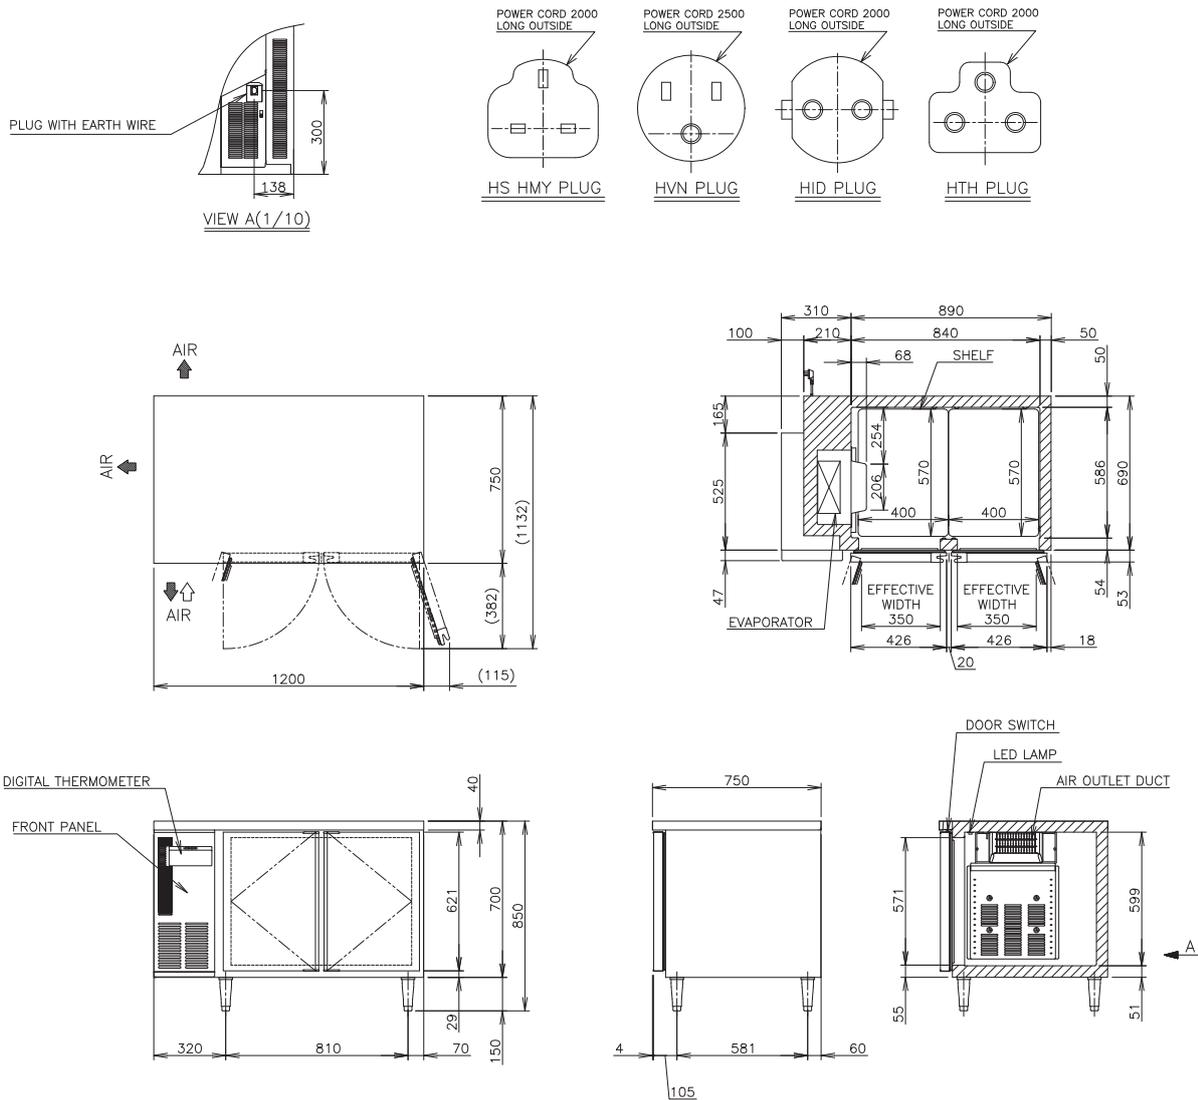

MODEL	RT-128MC-S
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.41kVA (1.86A)
ELECTRIC CONSUMPTION	2.07kWh/day
TEMPERATURE CONTROL	-6 to 12°C
STORAGE CAPACITY	307L
WEIGHT	Net: 80kg (Gross: Approx. 92kg)
OUTSIDE DIMENSIONS	1200mm(W)× 750mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1265mm(W)×830mm(D)×845mm(H)
NUMBER OF SHELVES	4pcs
REFRIGERANT	R290
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

PT. HOSHIZAKI INDONESIA

