
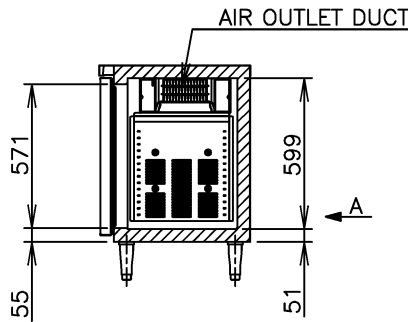
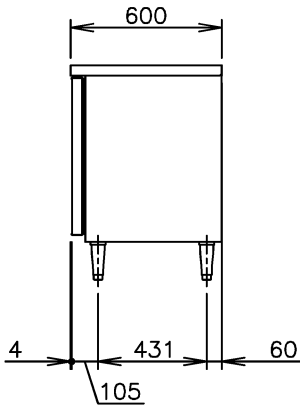
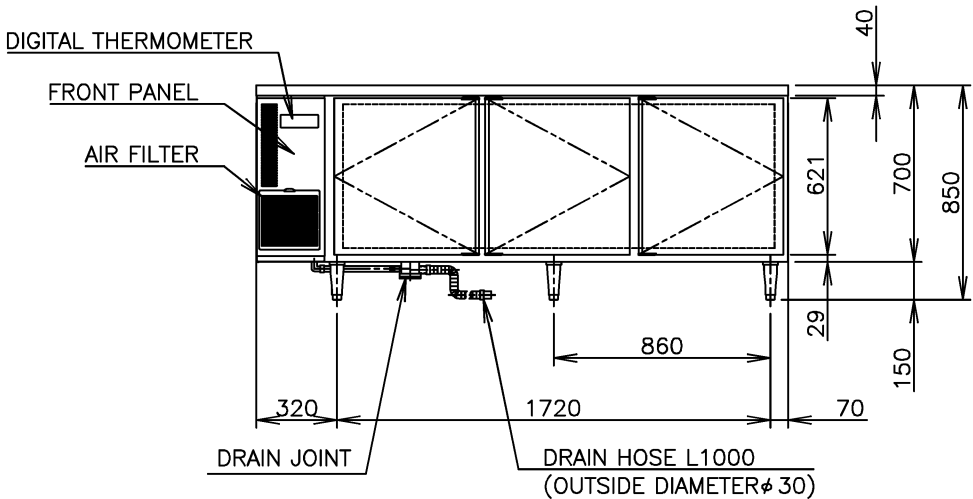
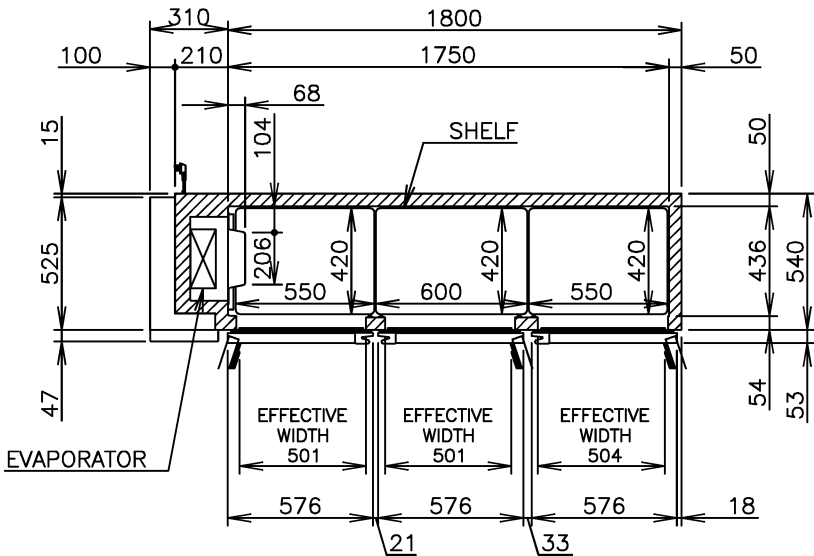
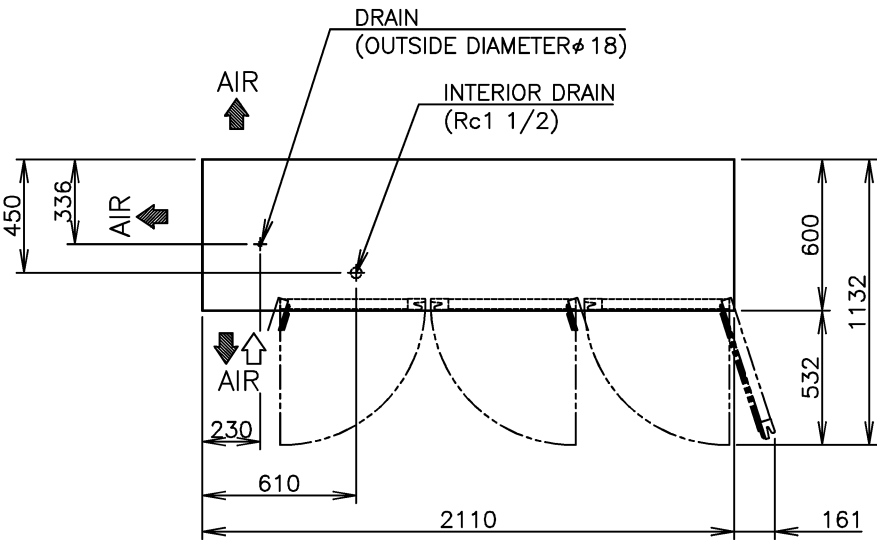



\* Customized specifications  
W=2110mm  
INTERIOR DRAIN HOLE

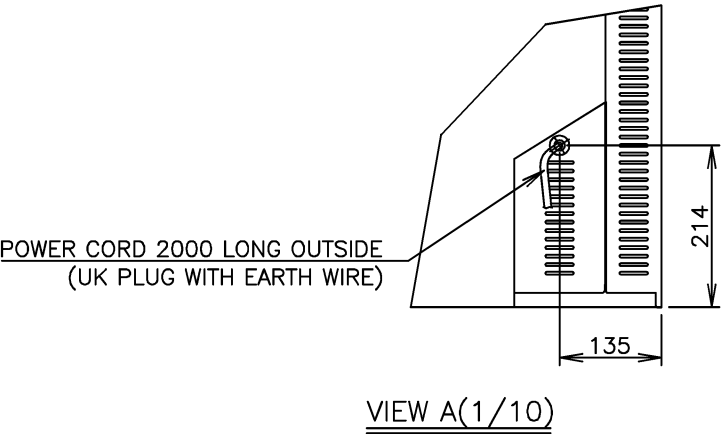

ITEM	Hoshizaki Undercounter Refrigerator
MODEL	RT-216MA-S
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.5kVA (2.27A)
AMPERAGE	Rated 2.0A
ELECTRIC CONSUMPTION	Motor 225W (Power Factor**%) Heater 92W Refrigeration 318W Defrost 92W
HEAT REJECTION	380W
POWER CORD	2.0m (UK Plug with Earth Wire)
EFFECTIVE CAPACITY	490L
OUTSIDE DIMENSIONS	2110mm (W) x 600mm (D) x 850(-880)mm (H)
INSIDE DIMENSIONS	1750mm (W) x 436mm (D) x 599mm (H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom) ABS Plastic (Top & Bottom on Door)
INTERIOR	Stainless Steel, ABS Plastic (Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Off Cycle
COMPRESSOR	Hermetic 280W (cooling capacity)
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R134a
TEMPERATURE CONTROL	Microprocessor controlled Adjustable from -2 to 12°C
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
LEG	Plastic Adjustable 150 to 180mm
SHELF	6pcs.
WEIGHT	Net:108kg (Gross: Approx. 114kg)
PACKAGE	Carton 2175mm (W) x 680mm (D) x 790mm(H)
ACCESSORIES	Drain Hose x 2, Drain Joint Set
OPERATING CONDITIONS	Ambient Temperature: 5-43°C Voltage Range: Rated Voltage±6%

\*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow). pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 220V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 220V 50Hz.
3. The cabinet temperature range of -2 to 12°C is guaranteed at ambient temperature of 30°C.
4. Product code: T238-D\*\*\* (HK)