

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO M/S WESTERN REFRIGERATION PVT. LTD. IT SHALL NOT BE REPRODUCED, COPIED OR DISCLOSED, IN WHOLE OR IN PART OR USED FOR MANUFACTURE OR FOR OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF M/S WESTERN REFRIGERATION PVT. LTD.

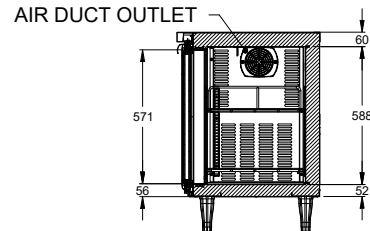

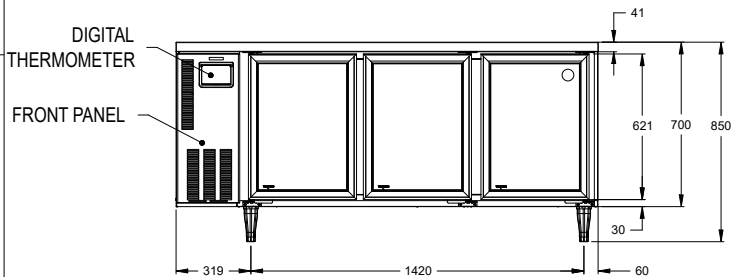
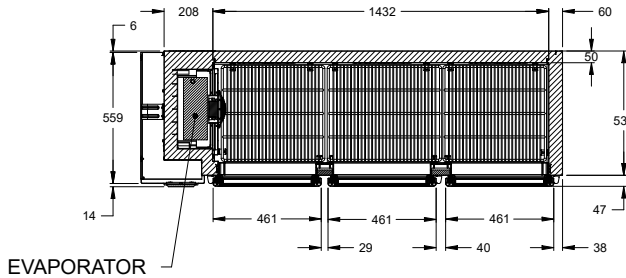
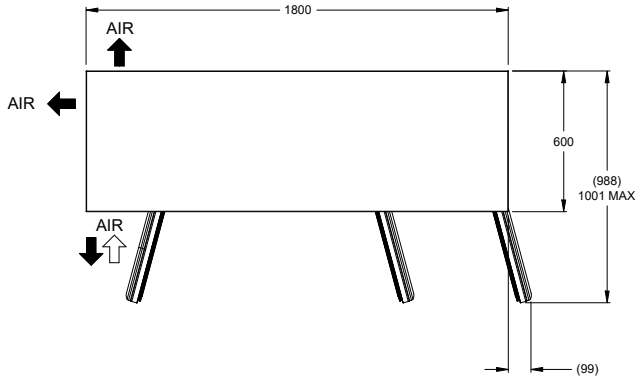
WRL/PDC/15,
REV A
DATE 01.03.2022

NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.

- OPTIONS:
1. PLASTIC 90MM HEIGHT LEG ARE AVAILABLE AS OPTION.
(MACHINE OVERALL HEIGHT WILL DECREASE BY 60 MM)
 2. CASTOR 124MM HEIGHT ARE AVAILABLE AS OPTION (REFER SHEET 2)
 3. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430

CHANGE NOTE

REVISION	SHEET NO	ZONE	DETAILS	ECN	DATE	DRAWN





*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

1. INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED.
ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
2. THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
3. TOLERANCE ON WEIGHT IS ± 5 KG

THIS ASSEMBLY DRAWING IS FOR ILLUSTRATION PURPOSE.
COMPONENTS, ASSEMBLY SEQUENCE MAY VARY DEPENDING UPON MANUFACTURING PRACTICES SPECIFIC TO MANUFACTURING LOCATIONS.
REFER PROCESS WORK INSTRUCTIONS FOR MORE DETAILS ON ASSEMBLY.
REFER SAP BOM FOR EXACT MATERIAL CONSUMPTION.

	ALL SUS430
LED VERSION	RTWH186LS4-GD



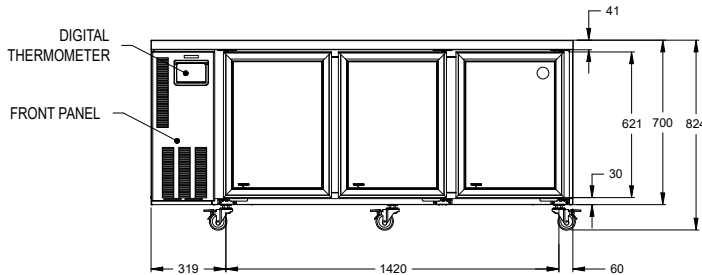
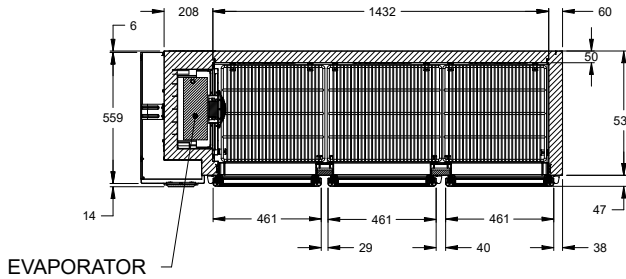
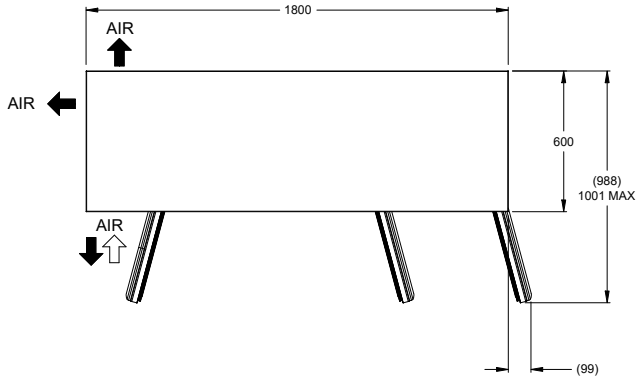
UNSPECIFIED TOLERANCES							SCALE: NTS  ALL DIMENSIONS ARE IN MM		TITLE UNDERCOUNTER GLASS DOOR REFRIGERATOR				DWG. NO: 0711958		REVISION A
DIM	<6	6-30	30-120	120-400	400-1000	>1000					SAP CODE -				
TOL	N/A	±1.0	±1.5	±2.0	±2.5	±3.0	DRAWN BY NIKHIL		MODEL RTWH186LS4-GD						
UNSPECIFIED TOL. ON ANGLE ±0.5															
1 * DIMENSIONS ARE IMPORTANT. 2 REFERENCE DIMENSIONS ARE MARKED WITH * () 3 PART SHOULD BE FREE FROM SHARP EDGES & BURRS							CHECKED BY PRATAP		RELEASE DATE 06.02.2024		SHEET 1 OF 2				
REFERENCE STANDARD -							APPROVED BY PARESH		RELEASE STAGE: RELEASED						

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO M/S WESTERN REFRIGERATION PVT. LTD. IT SHALL NOT BE REPRODUCED, COPIED OR DISCLOSED, IN WHOLE OR IN PART OR USED FOR MANUFACTURE OR FOR OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF M/S WESTERN REFRIGERATION PVT. LTD.

WRL/F/DC/15,
REV/A
DATE 01.03.2022

NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.



OPTIONS:
1. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430.



*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

- INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED.
ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
- THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
- TOLERANCE ON WEIGHT IS ± 5 KG

ITEM	HOSHIZAKI REFRIGERATOR
MODEL	RTWH186LS4-GD
POWER SUPPLY	SINGLE PHASE, 230V AC, 50HZ
AMPERAGE	2.1 AMPS
ELECTRIC CONSUMPTION	420 W
HEAT REJECTION	0.872 kW
POWER CORD	10 AMPS / 3 METER
EFFECTIVE CAPACITY	386L
OUTSIDE DIMENSIONS	1800 (W) X 600 (D) X 824 (H - WITH CASTOR)
INSIDE DIMENSIONS	1432 (W) X 480 (D) X 588 (H)
EXTERIOR	SS 430 HAIRLINE NO 4 FINISH, GALVANIZED STEEL POWDER COATED (REAR/BOTTOM)
INTERIOR	SS 430 HAIRLINE NO 4 FINISH
INSULATION	POLYURETHANE FOAM (CFC FREE)
INSULATION FOAM BLOWING AGENT	CYCLOPENTANE
REFRIGERATION SYSTEM	FORCED AIR CIRCULATION
DEFROST STSTEM	IN COMPRESSOR OFF CYCLE
COMPRESSOR	HERMETIC 588.3 W
CONDENSER	FORCED (WIRE ON TUBE)
EVAPORATOR	FORCED (FIN & TUBE)
REFRIGERANT/ CHARGE	R-290 / 72 Gram
TEMP. CONTROL	ELECTRONIC ADJUSTABLE FROM -2°C TO 12°C
DEFROST CONTROL	BY TEMPERATURE CONTROLLER
ELECTRIC CIRCUIT PROTECTION	NON RESETTABLE FUSE (GLASS FUSE) 10 AMP
COMPRESSOR PROTECTION	MOTOR PROTECTOR
CASTOR	6 NOS NON ADJUSTABLE
SHELF	6 PCS
WEIGHT	NET: 128KG (GROSS: APPROX 151KG)
PACKAGE	CARTON (WOODEN PALLET) 1870MM (W) X 670MM (D) X 875MM(H)
ASSESSORIES	SHELF CLIPS
OPERATING CONDITIONS	AMBIENT TEMPERATURE : 5 - 43°C VOLTAGE RANGE RATED VOLTAGE $\pm 6\%$
CABINET LAMP	LED STRIP TYPE 1310MM, 10W, DC24V
LAMP DRIVER	ELECTRONIC DRIVER 12W

		ALL SUS430	CABINET LAMP	LED STRIP TYPE 1310MM, 10W, DC24V		
LED VERSION		RTWH186LS4-GD	LAMP DRIVER	ELECTRONIC DRIVER 12W		
<div>SCALE: NTS</div> <div></div> <div>ALL DIMENSIONS ARE IN MM</div>		TITLE UNDERCOUNTER GLASS DOOR REFRIGERATOR		DWG. NO: 0711958		REVISION A
				SAP CODE -		
DRAWN BY NIKHIL		MODEL RTWH186LS4-GD		<div></div>		
CHECKED BY PRATAP		RELEASE DATE 06.02.2024	SHEET 2 OF 2			
APPROVED BY PARESH		RELEASE STAGE: RELEASED				