



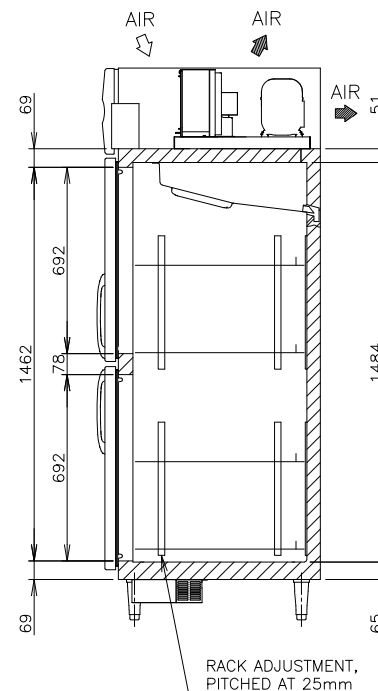

PLUG

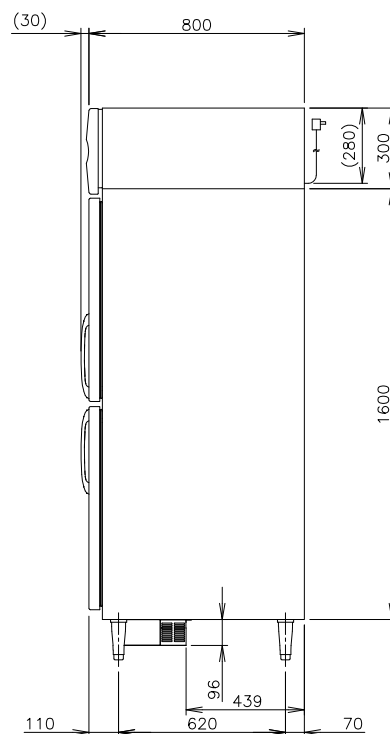

ITEM	Hoshizaki Reach—in Freezer
MODEL	HF—128MA—P—ML
POWER SUPPLY	1 Phase 230V 60Hz
AMPERAGE	Rated: *A
ELECTRIC CONSUMPTION	Heater: 455W Defrost: 250W
POWER CORD	2.3m (Plug with Earth Wire)
EFFECTIVE CAPACITY	1053L
OUTSIDE DIMENSIONS	1200mm(W) x 800mm(D) x 2050(–2080)mm(H)
INSIDE DIMENSIONS	1096mm(W) x 646mm(D) x 1484mm(H)
EXTERIOR	Stainless Steel, Galvanized Steel(Top, Rear, Bottom)
INTERIOR	Stainless Steel, ABS Plastic(Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Heater
COMPRESSOR	Hermetic
CONDENSER	Wire and Tube type, Air–cooled
EVAPORATOR	Fin and Tube type
REFRIGERANT	R404A
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from –23 to –70°C
DEFROST CONTROL	Microprocessor
ELECTRIC CIRCUIT PROTECTION	Earth Wire, Circuit Breaker
REFRIGERANT CIRCUIT PROTECTION	Motor Protector (Auto–reset)
LEG	Plastic Adjustable from 150 to 180mm
SHELF	8 pcs.
WEIGHT	149kg (Gross *kg)
PACKAGE	Carton (Wooden Pallet) 1260mm(W) x 900mm(D) x 2075mm(H)
ACCESSORIES	Drain Hose x 1, Drain Pan x 1
OPERATING CONDITIONS	Ambient Temperature: 5 – 43°C Voltage Range: Rated Voltage ±6%

1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided.
Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C.
3. Product Code: R595-C310 (PH)(Unreleased)

APPROVED LIANG		CHECKED LIANG		DESIGNED LIU		DRAWN LIU		SCALE 1/20		TRIGONOMETRY		
*	*			*****		DATE 2024.09.08		DRAWING NO. D39931			SYMBOL 	
APPROVED	DESIGNED	SYMBOL		DATE								