

CERTIFICATION




ICE MATE

by  HOSHIZAKI

SRM-80A ICE MAKER

DICE



ICEMATE is committed to bringing high-efficiency / energy-saving, and high quality ice-making product to people who have dreams and desire to create their own business with the best scientific technology and manufacturing technology.

KEY FEATURES

SAFETY AND HYGIENE ASSURED ICE MACHINE



NSF Certified Material
for Bin and Scoop



Detachable Parts for
Easy Cleaning



Air Filter Prevent Dust
from Entering



Stainless Steel

ENERGY & WATER SAVING, QUIET OPERATION



Energy & Water Saving,
Quiet Operation


EASY MAINTENANCE




IoT




DIMENSIONS

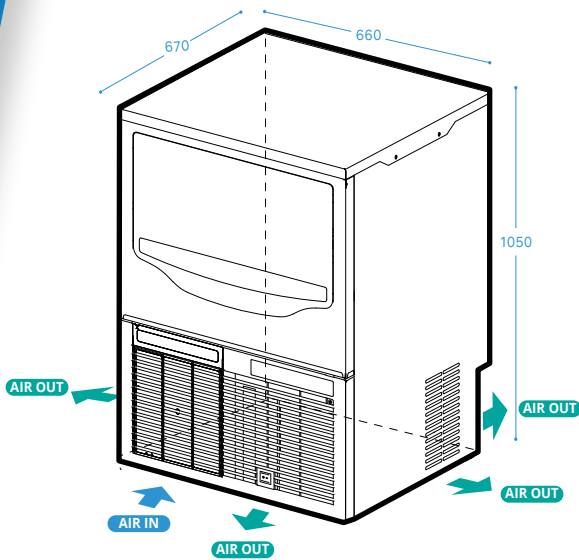


TOP SIDE

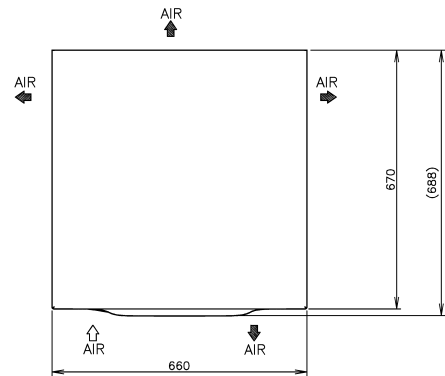


FRONT SIDE

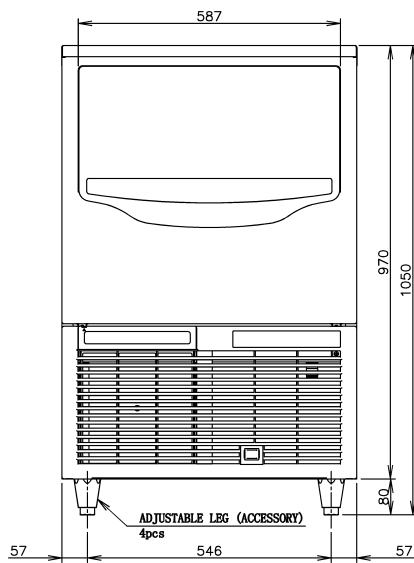

RIGHT SIDE

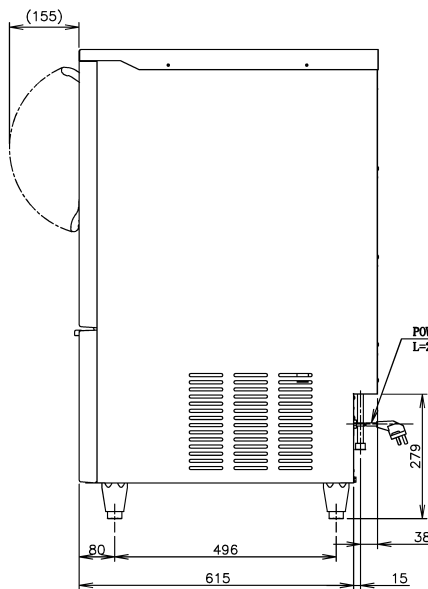

BACK SIDE

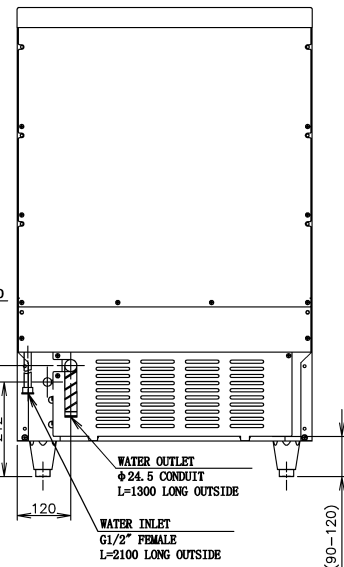

SPECIFICATIONS

Ice Dimensions (W x D x H)	22 x 22 x 22 mm
Outside Dimensions (W x D x H)	660 x 670 x 1050 mm
Package Dimensions (W x D x H)	Carton: 785 x 860 x 1100 mm
Weight (Net / Gross)	56.5 kg / 63 kg
Amperage / Starting Amperage	3.2A / 15.0A
Electrical Consumption	(AT32°C / WT21°C) 450 W
Refrigerant Charge	R404A / 230g
Ice Storage Capacity	Maximum 31.4kg
Ice Production per 24H	(AT10°C / WT10°C) Approx. 80 kg
	(AT21°C / WT15°C) Approx. 72 kg
	(AT32°C / WT21°C) Approx. 57 kg

Water Consumption per 24H	(AT32°C/WT21°C) 0.13m ³ (2.3L / kg Ice)
Ice Production Freeze Cycle Time	(AT21°C/WT15°C) 16 min
Ice Production per Cycle	(AT21°C/WT15°C) Approx. 0.81kg / 80 pcs

OPERATING CONDITIONS

Voltage Range	198 - 254 V
Ambient Temperature	5 - 38°C
Water Supply	5 - 32°C
Water Supply Pressure	0.07 - 0.55 Mpa (0.7 - 5.5 bar)
Supply Voltage	1/220 - 240V / 50Hz



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

16, JALAN TP5A, Prestij 16, Taman Perindustrian Uep, 47620, Subang Jaya, Selangor, Malaysia.
TEL +603-8023 5823 ht [tps://hoshizaki.com.my/](https://hoshizaki.com.my/)