

CERTIFICATION




ICE MATE

by  **HOSHIZAKI**

SRM-200AB -14-B-301SA ICE MAKER

HALF DICE



ICEMATE is committed to bringing high-efficiency / energy-saving, and high quality ice-making product to people who have dreams and desire to create their own business with the best scientific technology and manufacturing technology.

KEY FEATURES

SAFETY AND HYGIENE ASSURED ICE MACHINE

AUTO-CLEANING

Timely maintenance of water system can extend life of equipment.



PURE ICE


Overflow self-cleaning function, ensuring ice hygiene



IoT



Slow melt Dilution



Slow Dilution
Slower melting speed due to -7°C of inside temp of ice cube


Powerful Ice Making




Energy & Water Saving, Quiet Operation




DIMENSIONS

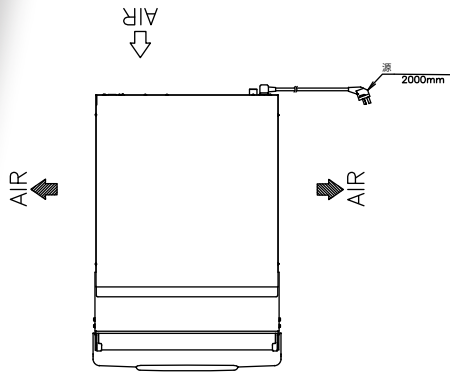


BIN TOP VIEW




RIGHT SIDE

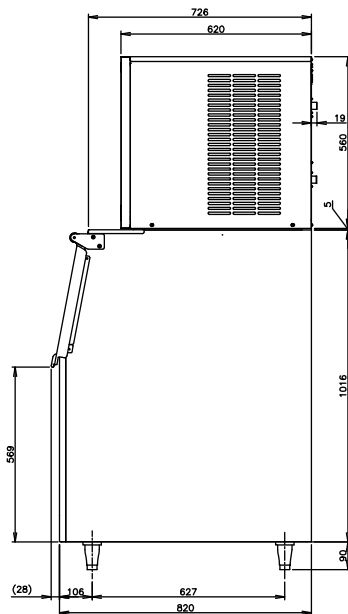

BACK SIDE

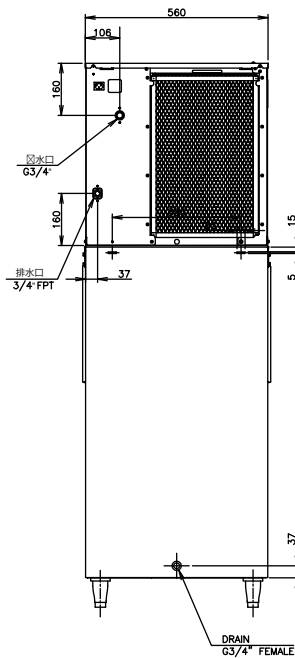

FRONT SIDE

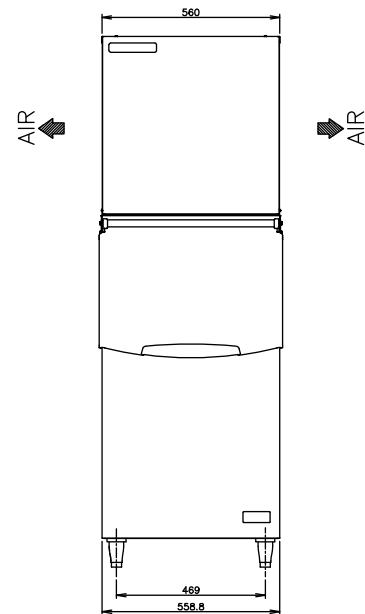

SPECIFICATIONS

Ice Dimensions (W x D x H)	29 x 14 x 22 mm	Water Consumption per 24H	(AT32°C/WT21°C) 0.15m ³ (1.1 L / kg Ice)
Outside Dimensions (W x D x H)	560 x 820 x 1671(~1701)mm	Ice Production Freeze Cycle Time	(AT21°C/WT15°C) 14.3 min
Package Dimensions (W x D x H)	Ice Maker: Pallet+Carton: 650 x 710 x 750mm Storage Bin: 655 x 924 x 1138mm	Ice Production per Cycle	(AT21°C/WT15°C) Approx. 1.8kg / 220 pcs
Weight (Net / Gross)	Ice Maker: 50kg / 66.5kg Storage Bin: 37kg / 49kg	OPERATING CONDITIONS	
Amperage / Starting Amperage	5.09A / 22A	Voltage Range	198 - 242 V
Electrical Consumption	(AT32°C / WT21°C) 804W	Ambient Temperature	5 - 38°C
Refrigerant Charge	R404A/480g	Water Supply	5 - 32°C
Ice Storage Capacity	Maximum 144 kg	Water Supply Pressure	0.07 - 0.55 Mpa (0.7 - 5.5 bar)
Ice Production per 24H	(AT10°C / WT10°C) Approx. 204 kg (AT21°C / WT15°C) Approx. 180 kg (AT32°C / WT21°C) Approx. 140 kg	Supply Voltage	1/220 - 240V / 50Hz



HOSHIZAKI

PT. HOSHIZAKI INDONESIA