



HOSHIZAKI

CERTIFICATION



HACCP International




ISO9001

RT-128MA-S-PR UNDERCOUNTER PREP TABLE



Key Features



Forced Evaporation System



LED Interior Lighting




GN Trays flexible arrangement
(GN Trays are not included)

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

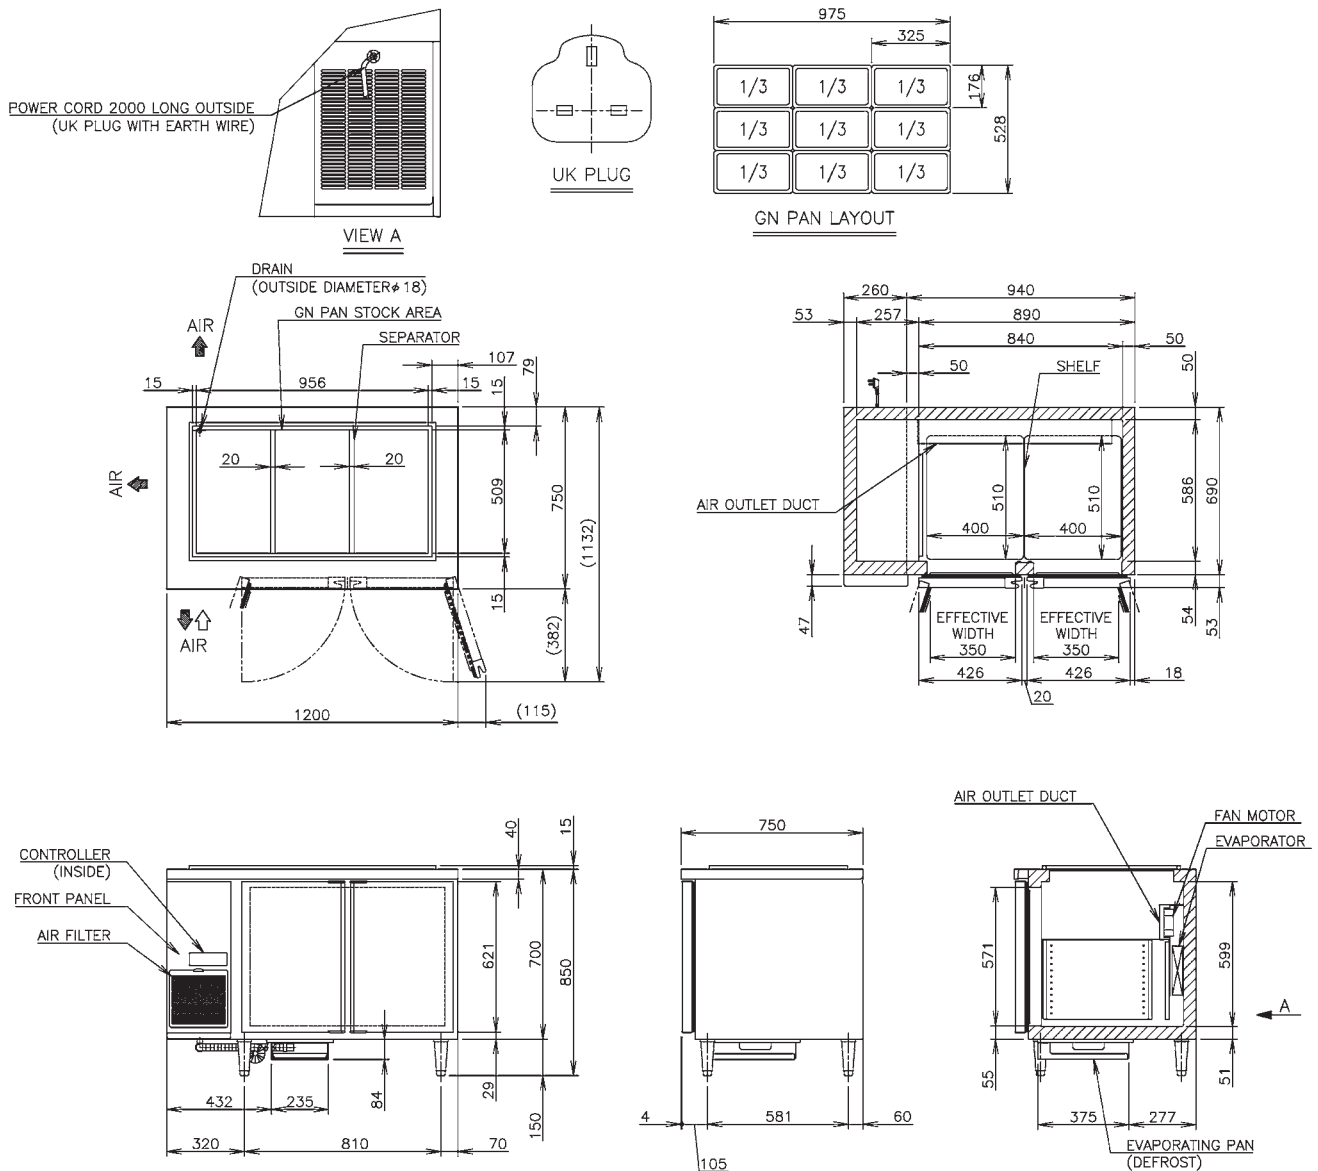

MODEL	RT-128MA-S-PR
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.6kVA (2.6A)
ELECTRIC CONSUMPTION	Motor: 262W Heater: 78W Refrigeration: 267 Defrost: 78W
TEMPERATURE CONTROL	Microprocessor Adjustable from - 2 to 12°C
EFFECTIVE CAPACITY	304L
WEIGHT	Net: 75kg (Gross: Approx 80kg)
OUTSIDE DIMENSIONS	1200mm(W)× 750mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1265mm(W)×830mm(D)×790mm(H)
AMPERAGE	Rated: 2.1A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 32°C, Voltage Range: Rated Voltage $\pm$ 6%



HOSHIZAKI

HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1, Soi Ngamwongwan 47
 Intersection 42, Thung Song Hong, Subdistrict, Lak Si District, Bangkok 10210
 TEL +66 2 005 9980 FAX +66 2 516 2646 <https://hoshizaki.co.th/en/>

